

## American Round Fuses Form 101 Range A100P



### Semiconductor Protection Fuses

A100P Amp-trap® Form 101 Semiconductor Protection fuses are rated 1000V, extending the range of protection for UPS systems, AC and DC drives, reduced voltage motor starters and similar applications where lower I<sup>2</sup>t and superior reliability are needed. With ratings from 15 through 1000 amperes, a wide range of high voltage applications can be served.

### Features/Benefits

- Low I<sup>2</sup>t minimizes damage to protected components on short circuit
- Controlled arc voltage reduces stress to circuit components during fuse clearing
  - Wide range of ampere ratings

### Ratings

- AC: 15-30A  
1000VAC, 100kA I.R.  
35-1000A  
1000VAC, 100kA I.R.
- DC: 15-1000A  
750VDC, 100kA I.R.

### Approvals

- UL Recognized Component
- AC: UL Guide No. JFHR2 (60-800A)
- DC: Ferraz Shawmut Certified

### Highlights


- Fast Acting
- Current Limiting
- Low I<sup>2</sup>t
- Optional Trigger Indicator

### Applications

- Protection of UPS systems AC/DC drives, reduced voltage motor starters and other 1000V or less semiconductor devices
- Spare markets only for new installations, refer to PC range




### Single Pole Fuse Blocks for A100P Fuses

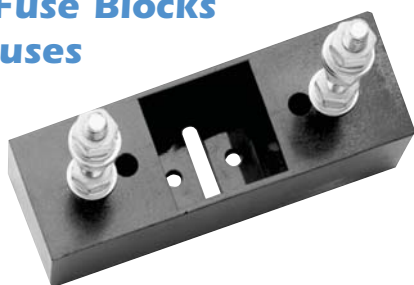

Fuse Ampere Rating	Fuse block	
	Catalog Number	Reference Number
35-100	P266G	Z214428
125-400	P266L	J215955

### Catalog Numbering System

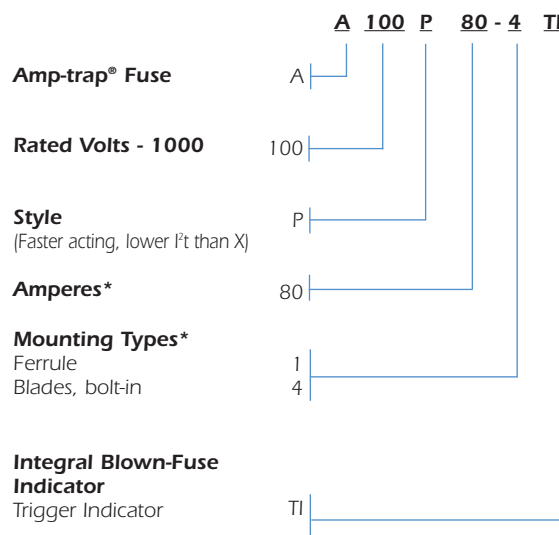



## American Round Fuses Form 101 Range A100P

### Semiconductor Protection Fuses

### Standard Fuse Ampere Ratings, Catalog and Reference Numbers

Ampere Rating	Catalog Number	Ref Number	Outline Fig.	Ampere Rating	Catalog Number	Ref Number	Outline Fig.	Ampere Rating	Catalog Number	Ref Number	Outline Fig.
15	A100P15-1	D222643	1	80	A100P80-4TI	Y202191	2	350	A100P350-4	Q201494	2
20	A100P20-1	Y212265	1	100	A100P100-4	A215832	2	350	A100P350-4TI	X202190	2
25	A100P25-1	J216852	1	100	A100P100-4TI	E216342	2	400	A100P400-4	Z212266	2
30	A100P30-1	E218918	1	125	A100P125-4	D218917	2	400	A100P400-4TI	Y213300	2
35	A100P35-4	S223162	2	125	A100P125-4TI	-	2	500	A100P500-4	W214816	3
40	A100P40-4	A211232	2	150	A100P150-4	R223161	2	500	A100P500-4TI	C215834	3
50	A100P50-4	Q213799	2	150	A100P150-4TI	Y200949	2	600	A100P600-4	A217373	3
50	A100P50-4TI	Y214312	2	200	A100P200-4	J212781	2	600	A100P600-4TI	Q218399	3
60	A100P60-4	G216344	2	200	A100P200-4TI	X213299	2	650	A100P650-4	F218919	4
60	A100P60-4TI	K216853	2	225	A100P225-4	F216343	2	700	A100P700-4	T223163	4
65	A100P65-4	-	2	250	A100P250-4	Z217372	2	800	A100P800-4	B211233	4
70	A100P70-4TI	-	2	300	A100P300-4	T219437	2	800	A100P800-4TI	L212783A	4
80	A100P80-4	R201495	2	300	A100P300-4TI	E222644	2	1000	A100P1000-4	Y217371	5

For ampere ratings and styles not listed, ask sales agent. All of these catalog and reference numbers are without TI



Figure 1

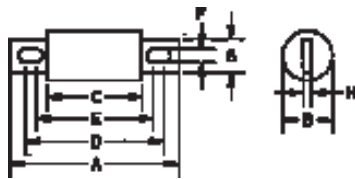


Figure 2

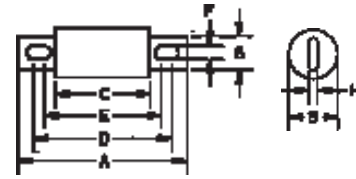


Figure 3

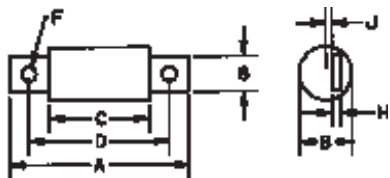


Figure 4




Figure 5

## Dimensions

Catalog Number	Mounting Type	Fig.	Dimensions - Inches (mm)								
			A	B	C	D	E	F	G	H	J
A100P15 to 30	1	1	2.63 (66.8)	0.56 (14.2)	-	-	-	-	-	-	-
A100P35 to 60	4, 4TI	2	5.00 (127)	1.00 (25.4)	3.50 (173)	4.31 (109)	4.19 (106)	0.31 (7.9)	0.75 (19.1)	0.13 (3.3)	-
A100P65 to 100	4, 4TI	2	5.00 (127)	1.22 (31.0)	3.50 (173)	4.31 (109)	4.19 (106)	0.31 (7.9)	1.00 (25.4)	0.19 (4.8)	-
A100P125 to 200	4, 4TI	2	5.72 (145)	2.00 (38.1)	3.47 (88.1)	4.78 (121)	4.16 (106)	0.41 (10.4)	1.00 (25.4)	0.25 (6.4)	-
A100P225 to 400	4, 4TI	2	5.72 (145)	2.00 (50.8)	3.47 (88.1)	4.78 (121)	4.16 (106)	0.41 (10.4)	1.50 (25.4)	0.25 (6.4)	-
A100P500 to 600	4, 4TI	3	7.72 (196)	2.50 (63.5)	3.47 (88.1)	5.88 (149)	5.56 (141)	0.53 (13.5)	2.00 (50.8)	0.38 (9.7)	-
A100P650 to 800	4, 4TI	4	7.44 (189)	2.88 (73.2)	3.94 (100)	5.94 (151)	-	0.63 (16.0)	2.00 (50.8)	0.38 (9.7)	0.31 (7.9)
A100P1000	4	5	8.22 (209)	3.50 (88.9)	4.47 (114)	6.59 (167)	5.84 (148)	0.63 (16.0)	2.75 (69.9)	0.50 (12.7)	1.38 (35.1)




# Semiconductor (AC) fuses


## American Round Fuses Form 101 Range A100P

### Semiconductor Protection Fuses

#### A100P15 to 1000

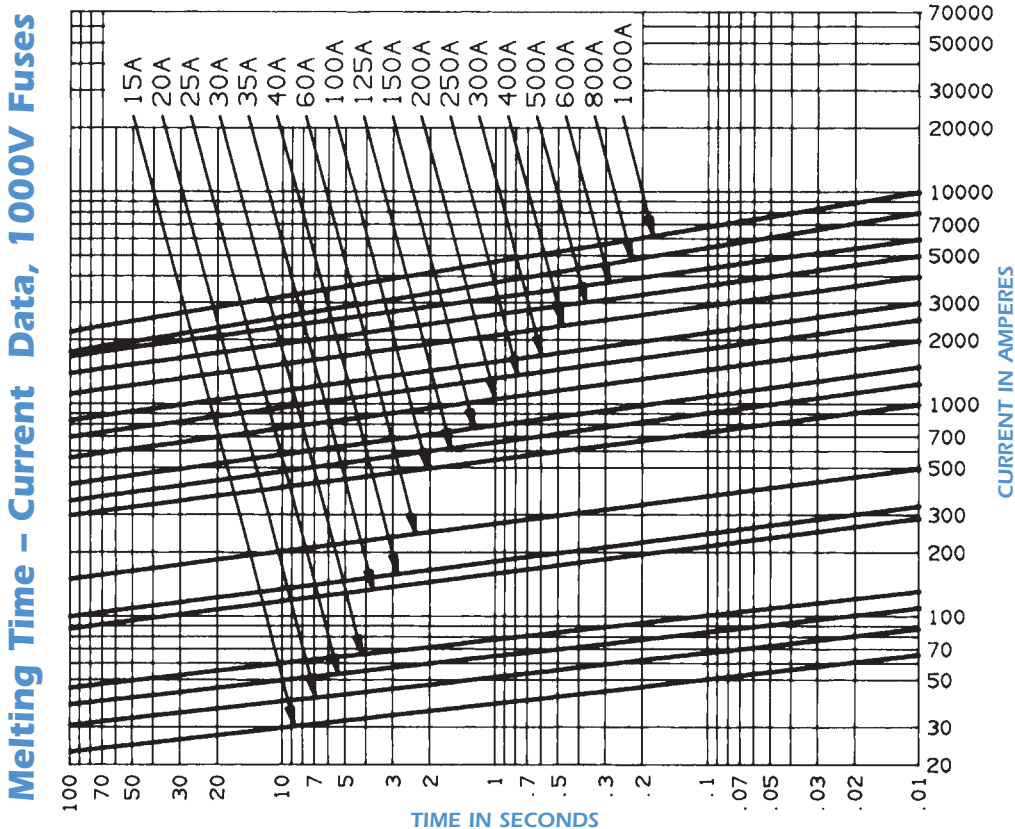

#### Peak Let-Thru Current Data - A100P30 to 1000, 1000 Volts AC

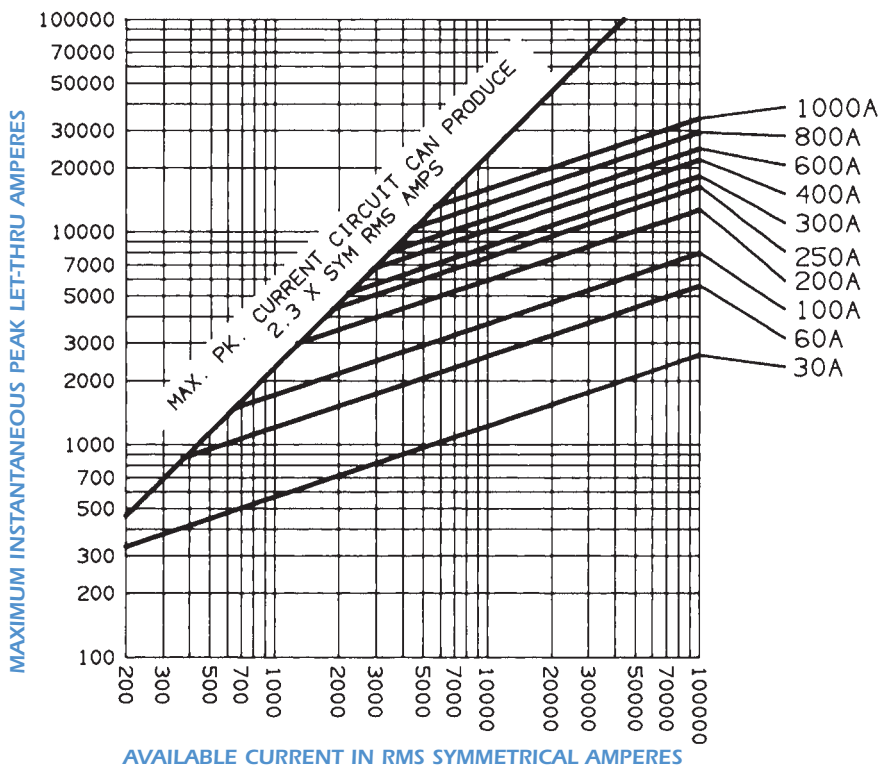

# Semiconductor (AC) fuses



## American Round Fuses Form 101 Range A100P

### Semiconductor Protection Fuses

### I<sup>2</sup>t Data – 1000 Volts AC, 100kA

Ampere Rating	I <sup>2</sup> t Data	
	Melting (A <sup>2</sup> x 10 <sup>3</sup> )	Clearing @1000VAC (fig A) (A <sup>2</sup> x 10 <sup>3</sup> )
15	.023	.6
20	.03	.8
25	.047	1.3
30	.057	1.5
35	.29	2.2
40	.38	2.9
50	.60	4.5
60	.86	6.5
65	1.0	7.6
70	1.2	8.8
80	1.5	12
100	2.4	18
125	3.8	28
150	5.4	41
200	9.6	72
225	12	91
250	15	110
300	22	160
350	29	220
400	38	290
500	60	450
600	86	650
650	100	760
700	120	880
800	150	1,200
1,000	240	1,900


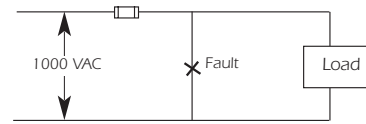


Fig. A

### Clearing I<sup>2</sup>t vs. AC Operating Voltage

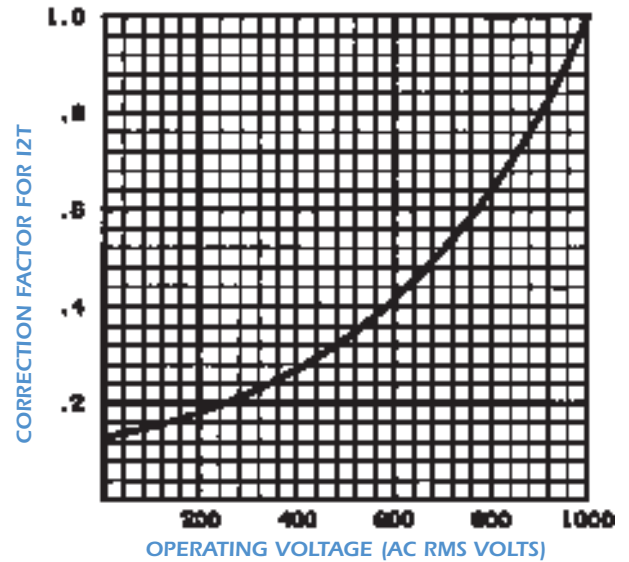

### Watts Loss at Rated Current

Ampere Rating	Watts Loss (W)	Ampere Rating	Watts Loss (W)
15	3.4	225	40
20	5.9	250	45
25	9	300	55
30	12.8	350	65
35	7.3	400	70
40	8.3	500	90
50	11	600	110
60	13	650	120
70	13	700	125
80	14	800	140
100	18	1000	190
125	23		
150	28		
200	36		

### Watts Loss vs. % Rated Current

