

## Multi-Meter fuses 10x35 -10x38 FSM - 1000 V AC/DC

Ferraz Shawmut has developed a true 1000V AC/DC fuse designed to protect both analog and digital multi-meters.

These fuses cover all the industry's multi-meter requirements in three easy to use amperage ratings. Good for 1000 volts AC and DC, the FSM line of Ferraz Shawmut fuses are designed for the power electronics metering and controls market.

### Features/Benefits

- For the protection of multi-meters
- 1000V AC/DC for full range protection
- 100% Current Rated for continuous current carrying capability
- Glass melamine body and plated terminals provide superior reliability and performance



### Highlights:

- Fast-Acting
- 1000 Volts AC/DC
- 20,000A Interrupting Rating @ 1000V AC/DC for all ratings
- (3) Ampere Ratings 44/100A, 11A, 15A
- Current-Limiting
- UL Recognized Component



### Dimensions:

| Catalog No. | A            | B      |
|-------------|--------------|--------|
| FSM44/100   | 1.375"/35 mm | 0.406  |
| FSM11       | 1.500"/38 mm | 0.406" |
| FSM15       | 1.500"/38 mm | 0.406" |

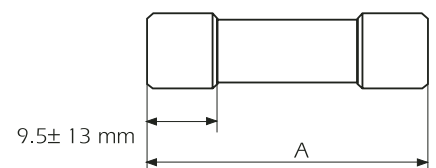

### Standard Fuse Ampere Ratings, Catalog Numbers

| Ampere Rating | Catalog Number | Reference Number |
|---------------|----------------|------------------|
| 44/100        | FSM44/100      | W232480          |
| 11            | FSM11          | X232481          |
| 15            | FSM15          | Y232482          |


### Cross Reference

Ferraz Shawmut **FSM** replaces the  
Bussmann: DMM-B  
Littelfuse: FLU

# Miniature Fuses

Multi-Meter fuses  
 10x35 -10x38  
 FSM - 1000 V AC/DC

## Melting current data

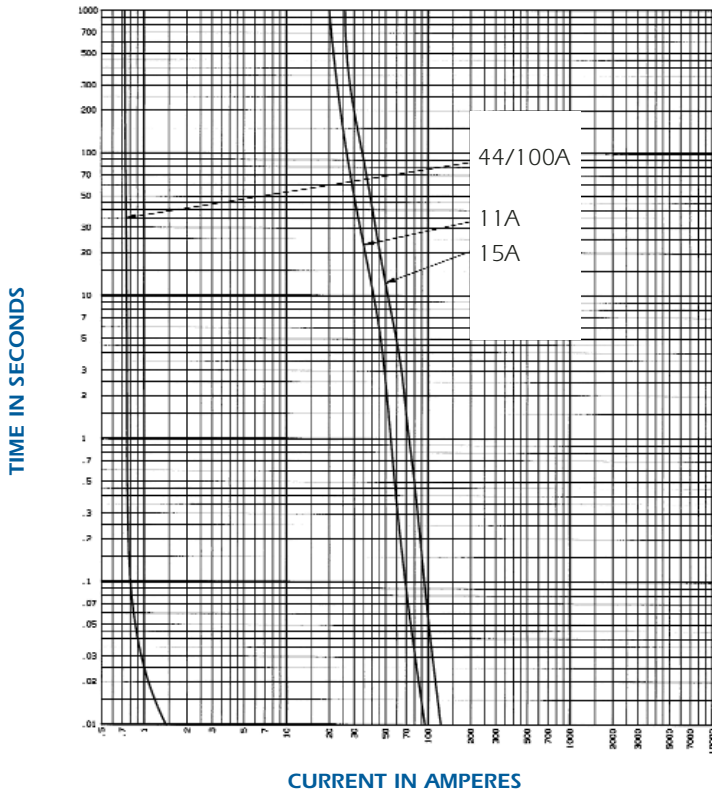

## Peak Let-Thru current data

